



Teralux Zigbee Smart Switch 1-3 Gang User Manual



Teralux Office

Komp. Ruko Harmoni Mas, Jl. Jemb. Dua Raya
No.15 blok A, RT.1/RW.3, Pejagalan, Penjaringan,
North Jakarta City, Jakarta 14450

Zigbee Wall Switch 1-3 Gang

The TERALUX Smart Wall Relay Switch Zigbee 1-3 Gang provides intelligent lighting control with seamless integration into the Tuya Smart ecosystem. Designed for reliability and safety, this compact module supports Zigbee 3.0 connectivity with an optional Wi-Fi version for flexible installation and compatibility with various smart home systems.

Features

Control your lights easily through the Tuya app, automation, or voice commands for a seamless smart home experience.

Available in 1, 2, or 3 gang configurations to suit different room layouts and lighting needs.



Use it as a standard wall switch or set it as a scene controller to activate multiple devices with one touch.

Powered by Zigbee 3.0 for fast response, reliable performance, and low power consumption.

Made from fireproof polycarbonate material, ensuring safety and long-term reliability.

Slim, elegant design with neutral color options that blend perfectly into modern interiors.


Mechanical Structure & Installation

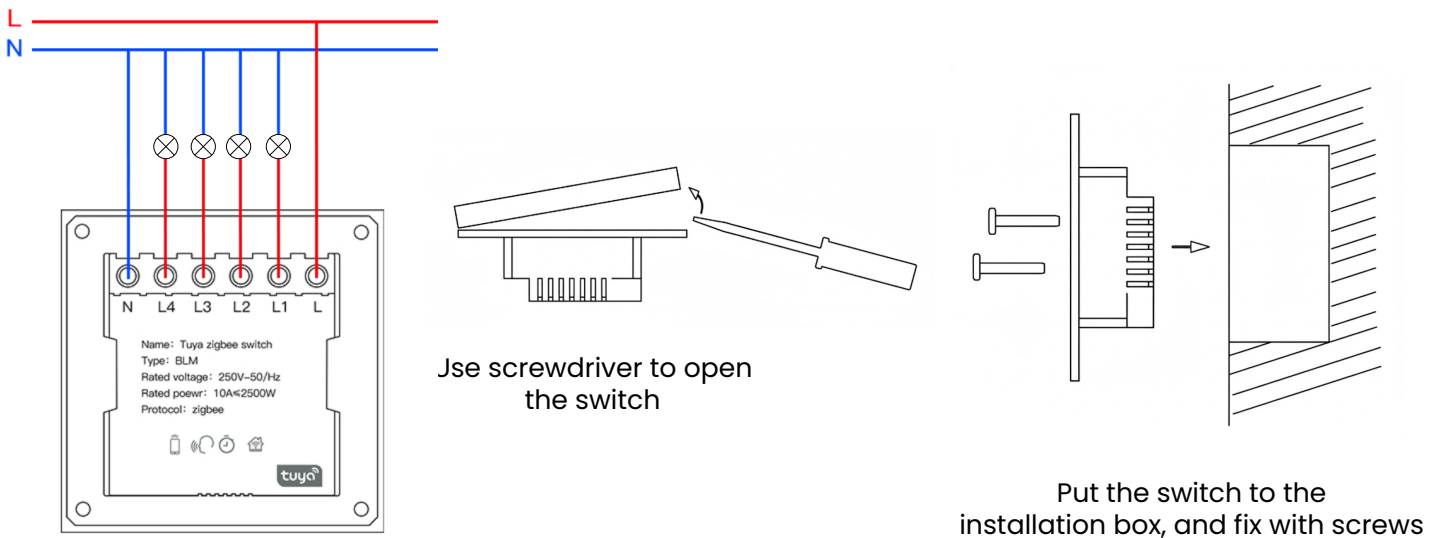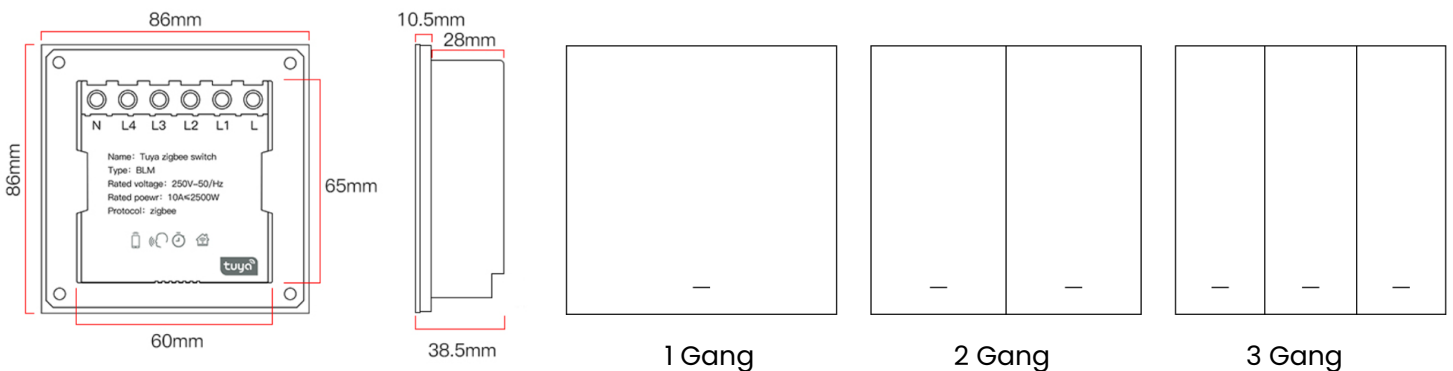

Technical Parameter


Parameter	Specification
Operational Voltage	100V to 240VAC, 50Hz/60Hz
Rated current	Max 10A (resistive load)
Load type	Incandescent lamp: 500W/gang LED lamp: 120W/gang Energy saving lamp: 200W/gang
Material	Fireproof Polycarbonate (PC)
Environment	Working temperature: 0–40 degrees Relative humidity: less than 95%
Scene 2 in 1	Adjustable between normal switch or scene switch
Normal Switch	Setup as local switch (Must be connected to the light)
Scene Switch	Setup as scene switch

System Diagram

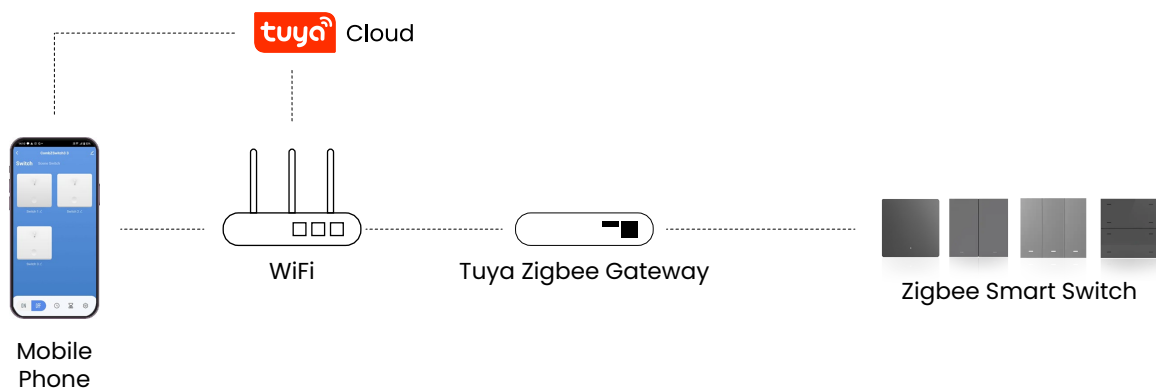


Pairing Guide


After the smart switch is connected to mains power, press the button quickly 5 times, then on the 6th press, hold it down until the light starts blinking. Once the light is blinking, open the Tuya app and follow the on-screen instructions to complete pairing.

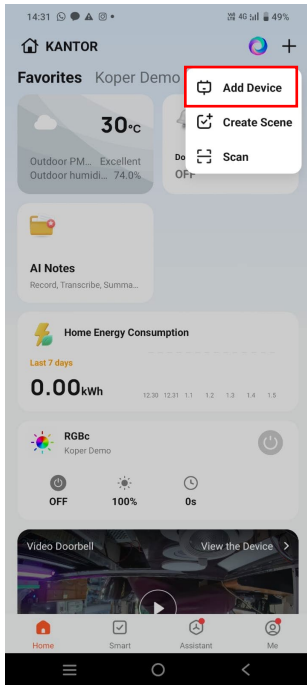


Add Device

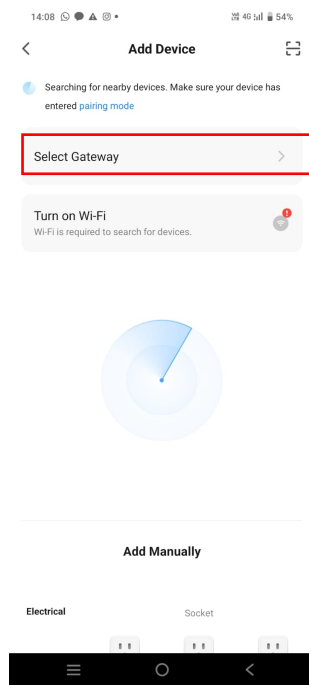

Select Nearby Gateway

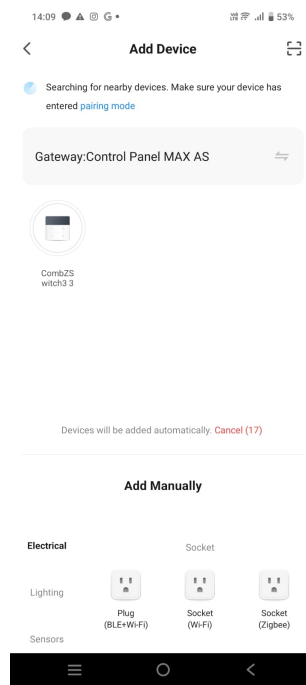

Nearby Device Detected

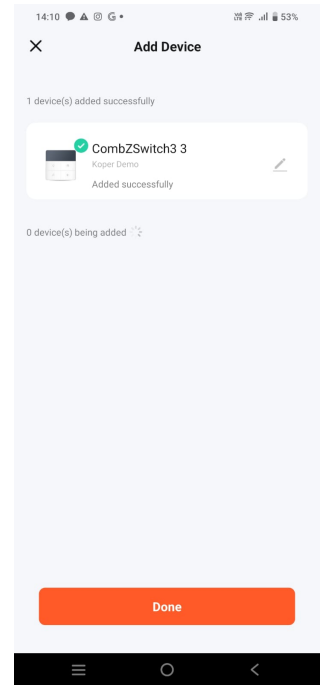

Rename and Done



Teralux Office

Komp. Ruko Harmoni Mas, Jl. Jemb. Dua Raya
No.15 blok A, RT.1/RW.3, Pejagalan, Penjaringan,
North Jakarta City, Jakarta 14450

teraluxliving.com